



 Lexmark™

Lexmark M3346

Exceptional performance, secure and sustainable



Lexmark M3346

With exceptional performance and secure design, the M3346 printer delivers enhanced productivity, up to 44 ppm* on A4 paper and a toner yield up to 31,000 pages**. Fast time to first print, superior print quality and easy-to-use touch screen.

Secure by design

Lexmark's expertise helps customers safeguard their data, devices, and networks. Our comprehensive security ecosystem is built to address even the most complex data protection challenges. We've now enhanced this framework with the Trusted Platform Module (TPM)***, which provides on-board authentication, system integrity checks, and cryptographic capabilities to generate a unique digital system fingerprint.

Proprietary technology

We own our core technologies across hardware, firmware, services, and solutions—enabling seamless integration and minimising the risk of security gaps between your documents, devices, and network.

Sustainability

With certifications including Energy Star®, Blue Angel, RoHS, and EPEAT® Silver, the M3346 is built for sustainability—today and into the future. Lexmark is an industry leader in the use of recycled content, with products incorporating at least 42% post-consumer recycled (PCR) materials and a continued focus on improvement. This product is also engineered for long life, designed to last and reduce waste.

Intelligent Design

Every touchpoint is engineered to withstand heavy usage while meeting accessibility standards. Steel frames reinforce the device, providing durability to help ensure consistent, long-term performance. These products are built for longevity, featuring long-life components and a design that allows for easy servicing with minimal tools.

Manageability

These IoT-ready devices support remote management, including setup, configuration, consumables monitoring, and diagnostics. Firmware updates can also be deployed remotely, making it easy to upgrade to the latest applications and security features.

Ongoing Professional Product Support


From easy installation to handling high-volume output over time, our devices are designed to be intuitive and user-friendly. Support resources include instructional and on-device videos, as well as simple, colour-coded guidance for maintenance tasks like toner replacement—making the user experience truly world-class.

* Print and copy speed combo: Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

** Average continuous mono declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19752. Actual yield will vary considerably based upon many factors. See www.lexmark.com/yields for more information.

*** The Trusted Platform Module (TPM) is not available in some countries.

Lexmark M3346

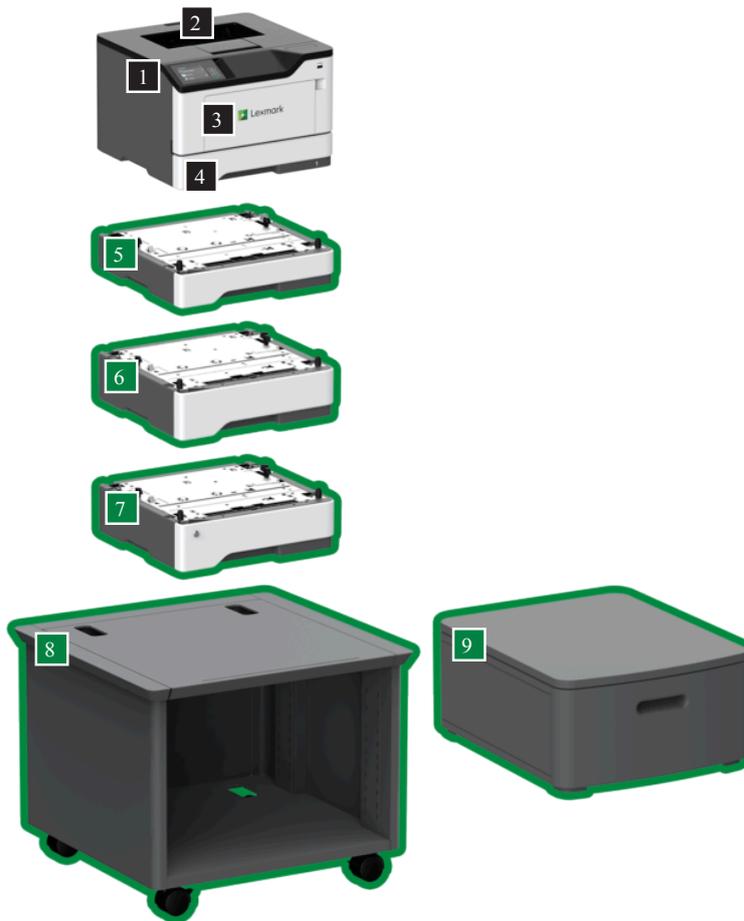

- 1 **Printer with 7.2 cm touch screen**
263.1 x 399 x 389.4 mm
- 2 **150-Sheet output bin**
Dimensions included as part of base model
- 3 **100-Sheet multipurpose feeder**
Dimensions included as part of base model
- 4 **250-Sheet tray**
Dimensions included as part of base model
- 5 **250-Sheet Tray**
78.1 x 389 x 373.7 mm
- 6 **550-Sheet Tray**
108.2 x 389 x 373.7 mm

- 7 **550-Sheet Lockable Tray**
108.2 x 389 x 373.7 mm
- 8 **Adjustable Stand**
584 x 597 x 597 mm
- 9 **Swivel Cabinet**
263 x 476 x 600 mm



P/N 38S0965	Hardware Lexmark M3346
P/N 24B7619	Supplies Lexmark M/XM3346 31K Toner Cartridge
66S0Z00	Lexmark MS531, 631, 632, 639, MX532, 632, M/XM3350 Return Programme 75K Imaging Unit
P/N 38S2910 38S3110 38S3130	Paper Handling 250-Sheet Tray 550-Sheet Tray 550-Sheet Lockable Tray
P/N 57X9528	Memory Options Intelligent Storage Device (ISD)
P/N 82S1203 82S1204	Application Solutions IPDS License Bar Code License
P/N 1021231 1021294 27X0900 27X0901 27X0912	Connectivity Parallel (10') Cable USB (2 Meter) Cable RS-232C Serial Interface Card Parallel 1284-B Interface Card Lexmark MarkNet™ N8230 Fiber Ethernet Print Server
SPD0002	Surge Protective Device, 220-240V
P/N 3073173 35S8502	Furniture Swivel Cabinet Adjustable Stand

*Supports any combination of 550-sheet and 250-sheet trays may be installed up to a total of 3 optional trays

Product Specifications

Lexmark M3346

Printing	
Display	2.8 inch (7.2 cm) Colour touch screen
Print Speed	Up to: Black: 44 ppm ¹ (A4)
Time to First Page	As fast as: Black: 6 seconds
Print Resolution	Black: 1200 x 1200 dpi, 1200 IQ (1200 x 600 dpi)
Memory	Standard: 512 MB / Maximum: 512 MB
Hard Disk	Intelligent Storage Drive (optional)
Recommended Monthly Page Volume	2000 - 15000 pages ²
Maximum Monthly Duty Cycle	Up to: 120000 pages per month ³
Supplies ⁴	
Laser Cartridge Yields	up to: 31,000 ⁵ -page Black Cartridge
Imaging Unit Estimated Yield	Up to: 75000 pages, based on 5 average letter/A4 size pages per print job and ~ 5% coverage for CS/CX96x, CX83x, CX95x, and MX95x printer series, or based on 3 average letter/A4 size pages per print job and ~ 5% coverage for all other printers
Cartridge(s) Shipping with Product	5,000 ⁵ -page Return Programme Toner Cartridge ⁵
Paper Handling	
Included Paper Handling	100-Sheet Multipurpose Feeder, Integrated Duplex, 150-Sheet Output Bin, 250-Sheet Input
Optional Paper Handling	550-Sheet Lockable Tray, 250-Sheet Tray, 550-Sheet Tray
Paper Input Capacity	Up to: Standard: 350 pages 75 gsm bond / Maximum: 2000 pages 75 gsm bond
Paper Output Capacity	Up to: Standard: 150 pages 75 gsm bond / Maximum: 150 pages 75 gsm bond
Media Types Supported	Paper Labels, Card Stock, Plain Paper, Envelopes, Refer to the Paper & Specialty Media Guide
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, Statement, C5 Envelope, Executive, DL Envelope, Folio, 10 Envelope
General Information ⁶	
Standard Connectivity	Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), 802.11a/b/g/n/ac + Apple iBeacon, USB 2.0 Specification Hi-Speed Certified (Type B)
Optional Network Ports / Optional Local Ports	MarkNet N8230 Fiber Ethernet Print Server / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial
Noise Level	Operating: 55 dBA (Print)
Specified Operating Environment	Temperature: 10 to 32°C (50 to 90°F) / Altitude: 0 - 2896 Metres (9,500 Feet) / Humidity: 15 to 80% Relative Humidity
Product Guarantee	1 Year Advanced Exchange
Size / Weight	H x W x D: 263.1 x 399 x 389.4 mm / 13.5 kg
ENERGY STAR Typical Electricity Consumption	TEC: 0.54 kilowatt-hours per week

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹ Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average standard page yield value declared in accordance with ISO/IEC 19752. ⁶ Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details.

© 2025 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are registered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorised use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT® is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).



lexmark.com