



 Lexmark™

Lexmark XM3346

Exceptional performance, secure and sustainable



Lexmark XM3346

With exceptional performance and secure design, the XM3346 multifunction printer (copy/scan/print/fax) delivers enhanced productivity, up to 44 ppm* on A4 paper and a toner yield up to 31,000 pages**. Fast time to first print, superior print quality and easy-to-use touchscreen.

Secure by design

Lexmark's expertise helps customers safeguard their data, devices, and networks. Our comprehensive security ecosystem is built to address even the most complex data protection challenges. We've now enhanced this framework with the Trusted Platform Module (TPM)***, which provides on-board authentication, system integrity checks, and cryptographic capabilities to generate a unique digital system fingerprint.

Proprietary technology

We own our core technologies across hardware, firmware, services, and solutions—enabling seamless integration and minimising the risk of security gaps between your documents, devices, and network.

Sustainability

With certifications including Energy Star®, Blue Angel, RoHS, and EPEAT® Silver, the XM3346 is built for sustainability—today and into the future. Lexmark is an industry leader in the use of recycled content, with products incorporating at least 42% post-consumer recycled (PCR) materials and a continued focus on improvement. This product is also engineered for long life, designed to last and reduce waste.



Intelligent Design

The 10.9 cm touchscreen provides standard access to built-in workflow solutions such as Scan Centre—an intuitive app that simplifies routing to multiple destinations simultaneously—and Shortcut Centre, which allows users to create personalised shortcuts for frequent copy, fax, and e-mail tasks. The embedded solutions framework also enables businesses to add the apps that matter most—either by selecting from our library or developing custom solutions.

Manageability

These IoT-ready devices support remote management, including setup, configuration, consumables monitoring, and diagnostics. Firmware updates can also be deployed remotely, making it easy to upgrade to the latest applications and security features.

Ongoing Professional Product Support

From easy installation to handling high-volume output over time, our devices are designed to be intuitive and user-friendly. Support resources include instructional and on-device videos, as well as simple, colour-coded guidance for maintenance tasks like toner replacement—making the user experience truly world-class.


This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

** Average yield based on approximately 5% print coverage. In demonstration of circular economy principles, genuine Lexmark supplies with Unison™ Toner may contain components recovered from the Lexmark Cartridge Collection Programme (LCCP). Lexmark Return Programme cartridges are subject to the terms and conditions of the Lexmark Return Programme. See lexmark.com/returnprogramme for more information. Regular cartridges without the terms and conditions of the Lexmark Return Programme are available on lexmark.com or through Lexmark Channel Partners.

*** The Trusted Platform Module (TPM) is not available in some countries.

Lexmark XM3346

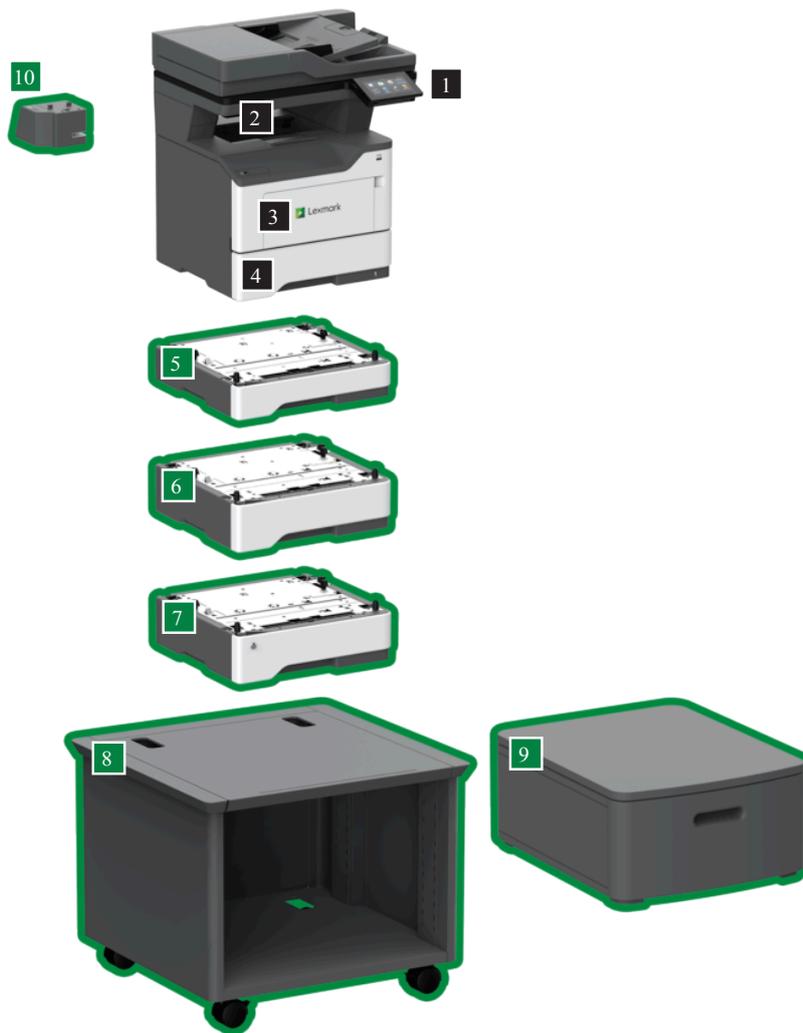

- 1 **Multifunction product with 10.9 cm touch screen**
513.7 x 479 x 450 mm
- 2 **250-Sheet output bin**
Dimensions included as part of base model
- 3 **100-Sheet multipurpose feeder**
Dimensions included as part of base model
- 4 **550-Sheet tray**
Dimensions included as part of base model
- 5 **250-Sheet Tray**
78.1 x 389 x 373.7 mm
- 6 **550-Sheet Tray**
108.2 x 389 x 373.7 mm

- 7 **550-Sheet Lockable Tray**
108.2 x 389 x 373.7 mm
- 8 **Adjustable Stand**
584 x 597 x 597 mm
- 9 **Swivel Cabinet**
263 x 476 x 600 mm
- 10 **Convenience Stapler HV**
82 x 109 x 121 mm



- P/N**
38S0975 **Hardware**
Lexmark XM3346
- P/N**
24B7619 **Supplies**
Lexmark M/XM3346 31K Toner Cartridge
- 35S8500 Staple Cartridges
- 66S0Z00 Lexmark MS531, 631, 632, 639, MX532, 632, M/XM3350 Return Programme 75K Imaging Unit
- P/N** **Paper Handling**
38S2910 250-Sheet Tray
- 38S3110 550-Sheet Tray
- 38S3130 550-Sheet Lockable Tray
- 47C4590 Convenience Stapler
- P/N** **Memory Options**
27X0400 500+ GB Hard Disk
- 57X9528 Intelligent Storage Device (ISD)
- P/N** **Application Solutions**
57X0225 Desktop Contactless Reader
- 57X0235 Contactless Front Solutions Module (Primary)
- 57X0300 Contact Authentication Device
- 57X0301 Contactless Authentication Device
- 82S1203 IPDS License
- 82S1204 Bar Code License
- P/N** **Connectivity**
1021231 Parallel (10') Cable
- 1021294 USB (2 Meter) Cable
- 27X0900 RS-232C Serial Interface Card
- 27X0901 Parallel 1284-B Interface Card
- 27X0912 Lexmark MarkNet™ N8230 Fiber Ethernet Print Server
- 57X7040 English Keyboard Kit
- SPD0002 Surge Protective Device, 220-240V
- P/N** **Furniture**
3073173 Swivel Cabinet
- 35S8502 Adjustable Stand

Product Specifications

Lexmark XM3346

Printing	
Display	Lexmark e-Task 10.9 cm (4.3-inch) colour touch screen
Print Speed	Up to: Black: 44 ppm ¹ (A4)
Time to First Page	As fast as: Black: 6 seconds
Print Resolution	Black: 1200 x 1200 dpi, 1200 IQ (1200 x 600 dpi)
Memory	Standard: 2048 MB / Maximum: 2048 MB
Hard Disk	Intelligent Storage Drive (optional); Magnetic Hard Disk (optional)
Recommended Monthly Page Volume	2000 - 15000 pages ²
Maximum Monthly Duty Cycle	Up to: 120000 pages per month ³
Copying	
Copy Speed	Up to: Black: 44 cpm ¹ (A4)
Time to First Copy	as fast as: Black: 6.5 seconds
Scanning	
ADF Scan	DADF (single pass Duplex)
A4/Ltr Duplex Scan Speed	Up to: Black: 98/104 sides per minute / Colour: 68/72 sides per minute
A4/Ltr Simplex Scan Speed	Up to: Black: 49/52 sides per minute / Colour: 34/36 sides per minute
ADF Paper Input Capacity	Up to: 100 pages 75 gsm bond
Faxing	
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps
Supplies ⁴	
Laser Cartridge Yields	up to: 31,000 ⁵ -page Black Cartridge
Imaging Unit Estimated Yield	Up to: 75000 pages, based on 5 average letter/A4 size pages per print job and ~ 5% coverage for CS/CX96x, CX83x, CX95x, and MX95x printer series, or based on 3 average letter/A4 size pages per print job and ~ 5% coverage for all other printers
Cartridge(s) Shipping with Product	5,000 ⁵ -page Return Programme Toner Cartridge ⁵
Paper Handling	
Included Paper Handling	100-Sheet Multipurpose Feeder, 250-Sheet Output Bin, Integrated Duplex, 550-Sheet Input
Optional Paper Handling	550-Sheet Lockable Tray, 250-Sheet Tray, 550-Sheet Tray
Paper Input Capacity	Up to: Standard: 650 pages 75 gsm bond / Maximum: 2300 pages 75 gsm bond
Paper Output Capacity	Up to: Standard: 250 pages 75 gsm bond / Maximum: 250 pages 75 gsm bond
Media Types Supported	Paper Labels, Card Stock, Plain Paper, Envelopes, Refer to the Paper & Specialty Media Guide
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, Statement, C5 Envelope, Executive, DL Envelope, Folio, 10 Envelope
General Information ⁶	
Standard Connectivity	Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), 802.11a/b/g/n/ac + Apple iBeacon, USB 2.0 Specification Hi-Speed Certified (Type B)
Optional Network Ports / Optional Local Ports	MarkNet N8230 Fiber Ethernet Print Server / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial
Noise Level	Operating: 55 dBA (Print) / 57 dBA (Copy) / 52 dBA (Scan)
Specified Operating Environment	Temperature: 10 to 32°C (50 to 90°F) / Altitude: 0 - 2896 Metres (9,500 Feet) / Humidity: 15 to 80% Relative Humidity
Product Guarantee	1-Year Onsite Service, Next Business Day
Size / Weight	H x W x D: 513.7 x 479 x 450 mm / 21.2 kg
ENERGY STAR Typical Electricity Consumption	TEC: 0.58 kilowatt-hours per week

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹ Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average standard page yield value declared in accordance with ISO/IEC 19752. ⁶ Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2025 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are registered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorised use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT® is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).