DETAILS by WAHL&ROSS

Hand Sanitising Dispenser Instruction Manual

Thank You!

We at Details by Wahl&Ross would like to thank you for your purchase! We hope that you will love and look after your product. Should you need help with your product or do you require spare parts please contact us. customercare@details.dk

Patent Pending Danish Design Made in Denmark

Please carefully read all instructions before operating and save for future reference.

Important Safeguards

- Remove any packaging material and promotional labels or stickers before using the dispenser for the first time.
- Do not place the dispenser near a heat source.
- Do not place the dispenser in direct sunlight.
- Do not place the dispenser in a fire escape.
- Do not fill with anything other than handsanitising liquid.
- Do not use outdoors.
- Do not lay down or tilt the dispenser when liquid is inside as it can potentially damage the product.
- Only place or store in temperatures between 10° and 27° Celcius

Technical Data

Power Supply

4x1.5V AA batteries (Not Included)

For best performance and longer battery life we recommend the use of:

Energizer Ultimate Lithium Batteries:

https://www.energizer.com/batteries/energizer-ultimate-lithium-batteries



Class III: This appliance is designed to be supplied from a separated extra-low voltage (SELV) power source. The voltage from a SELV supply is low enough that under normal conditions a person can safely come into contact with it without risk of electrical shock.

Model: Details Touch Free Dispenser


Material/Finish Front: Aluminium or Oak Wood

Matierial/Finish Back: ABS



1. In The Box

- Dispenser housing
- refillable bottle
- driptray
- battery door
- security screws
- wall mount bracket
- 2x Hex bits

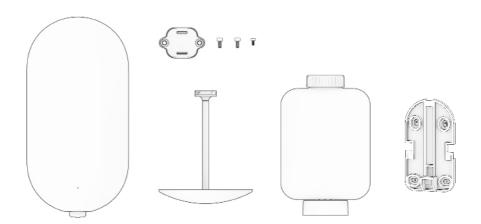

Not Included

- 4x AA batteries
- liquid hand sanitiser

If wall mounting you will also need:


- Pencil,
- Spirit level
- 4x wall plugs
- 4x wall screws
- drill

2. Care Instructions


Exterior can be whiped down with a soft cloth wringed in luke warm water with a gentle colourless diswashing liquid. All other parts can be cleaned by hand using warm water and a gentle dish washing liquid. Do not use abrasive cleansers, pads or cloths which can scratch the surface. Do not clean any of the parts or accessories in the dishwasher.

3. Setting Up


Place dispenser on level surface and open cover. Note! The dispenser will turn off when the lid is open.

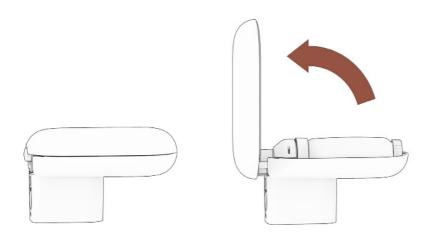

4. Remove the bottle



5. Insert 4x AA Batteries with direction as shown below (Not included).



6. Screw on battery door



7. Turn on & Dispensing Volume button

Turn on: Push and hold until lights flash fast. Dispensing Volume Setting: Push to change dosage setting. 1 light = low dosage / 5 lights = high dosage



8. Adhesive Mounted (Glass, Tiles etc)

Only mount on clean, smooth and even surfaces, do not mount on gaps or grout. Clean mounting surface thoroughly. Mark position on wall using a spirit level. Peel away the adhesive tape cover and press the backplate hard against wall for 20 seconds.

Allow 24 hours for glue to cure before mounting dispenser!






9. Wall Mounting

Create level marks on the wall using a spirit level. Level the backplate and mark the holes. Pre-drill and use wall plugs and screws appropriate to the wall.

Screw backplate onto the wall.




10. Stand Mount (Stand Sold Seperately)

Peel off sticker and mount backplate to stand aligning holes. Insert and tighten screws supplied with stand.






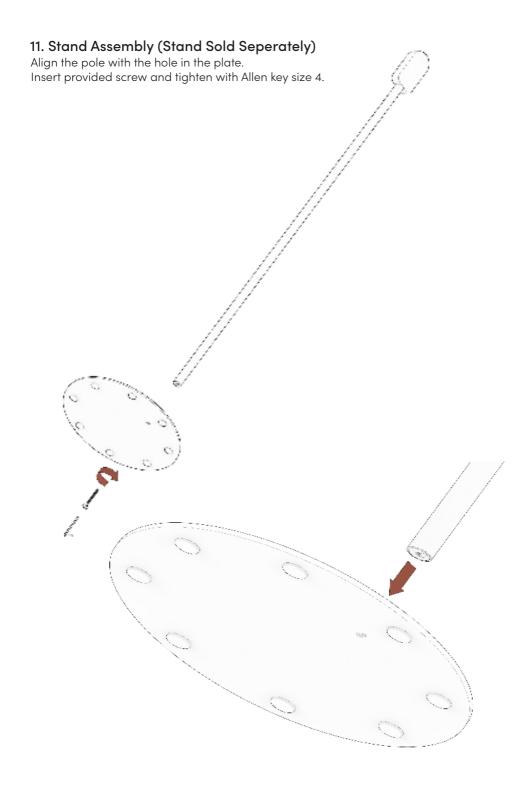


12. Mount the product onto the backplate on the wall

Position approx 1 cm above the backplate and push down gently.



13. Secure to backplate


Insert provided screw to keep dispenser securely mounted to wall or stand



14. Attach driptray by twisting 90° Clockwise



15. Insert screw to secure driptray.




16. Filling


Place bottle on flat surface and remove lid.




17. Fill bottle with liquid hand sanitiser.



18. Securely fasten lid on refill bottle then press bottle down into dispenser pump.



19. Close front cover to power on and prime the pump. Test with hand until liquid is dispensed.




20. Top Up

Bottles can be refilled or topped up in position.



21. Refill & Swap

Bottles can be refilled remotely and replace the empty bottles.

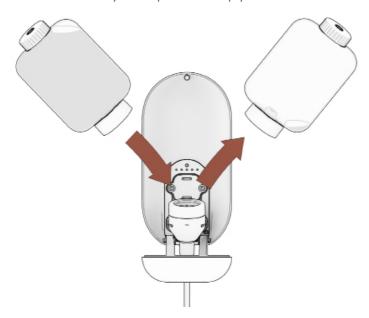


Pro Tip*

For fast bulk refill we recommend you set up a Refill Station

Large numbers of bottles can be refilled ideal for hospitality, hotels and large businesses.

For enquiries regarding custom refill stations please contact us hello@details.dk

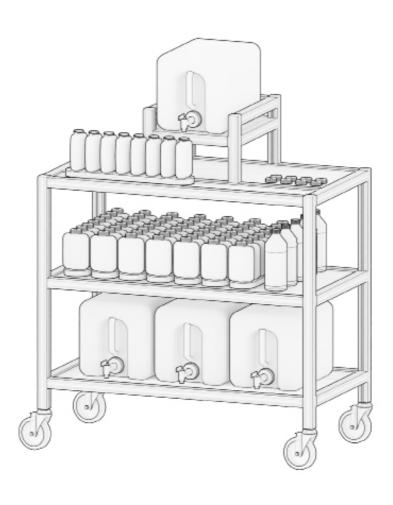

If you one day need to dispose of this product please do so in an environmentally friendly manner.



Environmental Information

"Electrical and electronic equipment (EEE) contains materials, components and substances that may be hazardous and present a risk to human health and the environment when waste electrical and electronic equipment (WEEE) is not handled correctly. Equipment marked with the above crossed-out wheeled bin is electrical and electronic equipment. The crossed-out wheeled bin symbol indicates that waste electrical and electronic equipment should not be discarded together with unseparated household waste, but must be collected separately.

For this purpose all local authorities have established collection schemes under which residents can dispose waste electrical and electronic equipment at a recycling centre or other collection points, or WEEE will be collected directly from households. More detailed information is available from the technical administration of the relevant local authority. Users of electrical and electronic equipment must not discard WEEE together with household waste. Residents must use the municipal collection schemes to reduce adverse environmental impacts in connection with disposal of waste electrical and electronic equipment and to increase opportunities for reuse, recycling and recovery of waste electrical and electronic equipment".

DETAILS by WAHL&ROSS

Details by Wah&Ross Bygmarken 26 DK-3520 Farum customercare@details.dk

Manufacturer: Wahl&Ross ApS Bygmarken 26 DK-3520 Farum

Patent Pending
Designed and Developed In Denmark
Made in Denmark